

## General Safety and Maintenance Manual



**PISTOL TYPE CHIPPING HAMMER**



Model Number	Exhaust Direction	Tool Nose	Bore and Stroke	Weight	Length	Diameter	Air Consumption
NA-16PX	Front	0.401	.63 Inch x	3.5 Lb.	8.5	1.7	15 cfm
80L compatible	Front	Round or 0.371 Hex	1.44 Inch (16 mm x 37 mm)	(1.6 Kg)	Inches (216 mm)	Inches (43 mm)	(7.1 L/S)

**THE HENRY TOOL CO., MANUFACTURED BY HENRY TOOLS**


**498 SO. BELVOIR BLVD., SOUTH EUCLID, OH 44121 U.S.A.**

**PH: (216) 291-1011 OR (800) 826-5257 • FAX: (216) 291-5949 OR (800) 303-2800**

**EMAIL: DAVIDH@MSN.COM • WEBSITE: WWW.HENRYTOOLS.COM**



**MODELS**  
**NA-16PX**  
**NA-16PR**

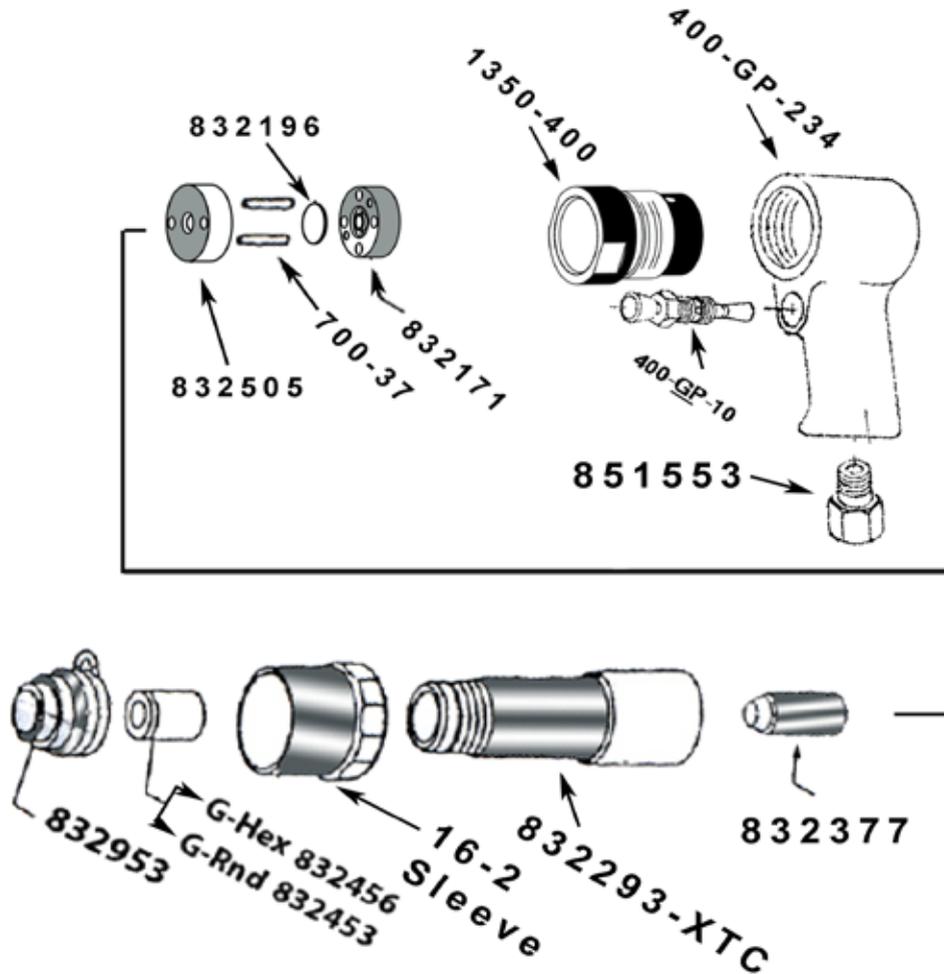

PARTS LIST	DESCRIPTION
400-GP-10	TRIGGER ASSEMBLY
400-GP-234	Pistol Grip Housing
16-2	Sleeve
1350-400	Coupling
700-37	Pin (Note: 2 are Req'd)
832171	Valve Cover
832196	Flutter Valve Disc
832293-XTC	Barrel
832377	Piston

PARTS LIST	DESCRIPTION
832453	Round Tool Nose
832456	Hex Tool Nose
832505	Valve Button
832953	Beehive Spring
841553	Screen Handle bushing

HENRY TOOLS, INC. PH: (216) 291-1011 or (800) 826-5257



**MODELS**  
**NA-16PX**  
**NA-16PR**

**When using compressed air:**

- A. Use only sound, strong hose with secure couplings and connections.
  - B. Be sure there are no sharp points on metal hose parts.
  - C. Close the control valve in portable pneumatic tools before turning on air.
  - D. Before changing one pneumatic tool for another, turn off the air control valve. Never kink hose to stop air flow.
  - E. Wear suitable goggles, mask, protective clothing or safety devices.
  - F. Never use air to blow dust or chips from a persons hair, clothing, or safety devices.
  - G. Never point the hose at anyone. Practical jokes with compressed air have caused many serious injuries.
  - H. When using compressed air, see that no nearby workers are in line of airflow.
  - I. All compressed air supplies used for blowing must be equipped with 30 p.s.i. regulators.
  - J. If working with or near compressed air tools, wear goggles. Never point the tool or air hose at any person.
    - 1. Before starting work, learn what is underneath the surface. If gas pipe, electric conduit, sewers, water mains, or other objects are in the area, get definite information of their location (blueprints, if possible) and avoid them carefully.
    - 2. Wear safety shoes, goggles, and hard hats at all times.
- Also, wear ear protection.
- 3. Inspect the machine and equipment regularly, especially drill steel. Never use defective equipment.
  - 4. Check valves and connections carefully. Be especially careful when laying down the tool so that the trigger cannot be operated accidentally.
  - 5. Thoroughly examine the slope and flare for loose rock.
  - 6. Keep a good grip and watch your footing when tool is in use.
  - 7. **NEVER POINT A PORTABLE POWER HAMMER AT ANYONE.**
  - 8. Before disconnecting a portable pneumatic tool,

always turn the air off at the base control valve.

9. If the job is near a sidewalk or other thoroughfare, place suitable screens to protect passersby from flying particles.

**PERSONAL PROTECTION**

There is no personal protective equipment that has proved to be effective against HAVS in stonemasons' yards. Anti-vibration gloves may be beneficial in keeping hands warm but they are generally not effective at reducing vibration at the low frequencies which are important in the development of VWF.

However, it is important to keep hands warm, as this increases blood flow. This can be done by wearing thermal gloves and providing localized heating and rest breaks in cold conditions for workers to exercise and keep their hands warm. Exercising hands and fingers.

10. Never use compressed air to blow dirt, dust, or chips from hands, face, or clothing.

HENRY TOOLS, INC. PH: (216) 291-1011 or (800) 826-5257




**MODELS**  
**NA-16PX**  
**NA-16PR**

PARTS LIST	DESCRIPTION
<b>400-GP-10</b>	<b>TRIGGER ASSEMBLY</b>
400-GP-234	Pistol Grip Housing
16-2	Sleeve
1350-400	Coupling
700-37	Pin (Note: 2 are Req'd)
832171	Valve Cover
832196	Flutter Valve Disc
832293-XTC	Barrel
832377	Piston
832453	Round Tool Nose
832456	Hex Tool Nose
832505	Valve Button
832953	Beehive Spring



**CHISELS**

Part No.	Description	Cutting Edge Width	Overall Length	Shank Type
595001	Narrow	1/2"	7"	.401 Round Shank
595003	Narrow	1/2"	12"	.401 Round Shank
595004	Narrow	1/2"	18"	.401 Round Shank
595009	Narrow	1/2"	7"	.371 Hex Shank
596010	Narrow	1/2"	12"	.371 Hex Shank
596001	Narrow	1/2"	18"	.371 Hex Shank



HENRY TOOLS, INC. PH: (216) 291-1011 or (800) 826-5257

# Henrytools

Industrial Tools at Work

## MODELS

N-16X

N-16R

N-16T

## General Safety and Maintenance Manual



Model Number	Exhaust Direction	Tool Nose	Bore and Stroke	Weight	Length	Diameter	Air Consumption
N-16X	Side Exhaust	0.401	.63 Inch x	3.5 Lb.	8.5	1.7	15 cfm
N-16R	Side Exhaust	Round or 0.371 Hex	1.44 Inch (16 mm x 37 mm)	(1.6 Kg)	Inches (216 mm)	Inches (43 mm)	(7.1 L/S)

**THE HENRY TOOL CO., MANUFACTURED BY HENRY TOOLS**

**498 SO. BELVOIR BLVD., SOUTH EUCLID, OH 44121 U.S.A.**

**PH: (216) 291-1011 OR (800) 826-5257 • FAX: (216) 291-5949 OR (800) 303-2800**

**EMAIL: DAVIDDH@MSN.COM • WEBSITE: WWW.HENRYTOOLS.COM**